

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G08C 13/00		A2	(11) International Publication Number: WO 99/46745
			(43) International Publication Date: 16 September 1999 (16.09.99)
(21) International Application Number: PCT/IB99/00702 (22) International Filing Date: 10 March 1999 (10.03.99) (30) Priority Data: 1008548 10 March 1998 (10.03.98) NL (71) Applicant (for all designated States except US): KONINKLIJKE KPN N.V. [NL/NL]; Stationsplein 7, NL-9726 AE Groningen (NL). (72) Inventors; and (75) Inventors/Applicants (for US only): PIETERSE, Rob [NL/NL]; Verbenalaan 1, NL-2111 ZL Aerdenhout (NL). DE LEEUW, Edo, Mark, Alexander [NL/NL]; Asterstraat 31, NL-3551 SW Utrecht (NL). VAN DER PUT, Ronald, Robertus, Gerardus, Laurentius [NL/NL]; Hoekmanstraat 26, NL-1315 JN Almere (NL). (74) Agent: KLEIN, Bart; Koninklijke KPN N.V., P.O. Box 95321, NL-2509 CH The Hague (NL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>In English translation (filed in Dutch). Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: METHOD AND SYSTEM FOR TRANSMITTING DATA

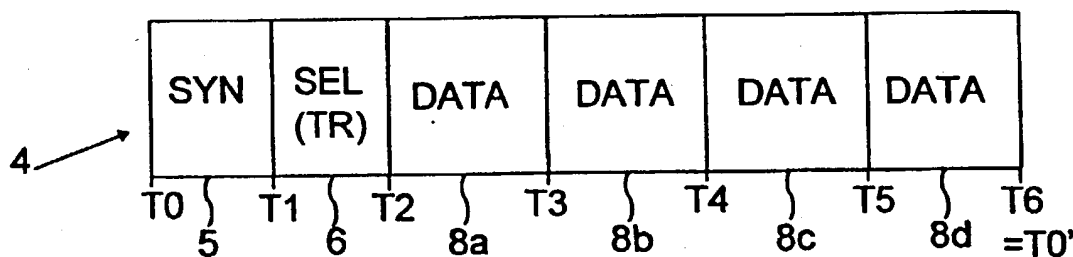

(57) Abstract

A method for transmitting data from several first stations (1a-1n), such as measuring stations, to a second station (2), such as a data-collection station, comprises: transmitting, in a synchronisation time slot (5) of a time window (4), a synchronisation message (SYN) from the second station (2) to the first stations (1), transmitting, in a selection time slot (6) of the time window (4), selection messages (SEL) from the second station (2) to selected first stations (1), transmitting, in response time slots (8) of the time window (4), data from selected first stations (1) to the second station (2). In order to save energy in the first stations, the selection messages (SEL) are transmitted in one single selection time slot (6) and its receiver (12) is switched off by each first station (1) if no respective selection message (SEL) has been transmitted.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Method and system for transmitting data.

The invention relates to a method for transmitting data from several first stations to a second station, the first stations each comprising at least a first transmitter, a first receiver and a first clock and the second station comprising at least a second transmitter, a second receiver and a second clock, the method comprising:

- transmitting, in a synchronisation time slot of a time window, a synchronisation message from the second station to the first stations,
- transmitting, in a selection time slot of the time window, selection messages from the second station to selected first stations,
- transmitting, in response time slots of the time window, data from selected first stations to the second station.

Such a method is disclosed in the American patent specification 5,297,144.

A method of the above type is applied, e.g., for transmitting data, such as measurement data, from several dispersed local stations (first stations) to a central station (second station). In doing so, the second station, which collects the data from the first stations and/or passes it on to a further station, may have the first stations transmit data by polling. The transmission may take place wirelessly by way of, e.g., a radio link, but also by way of a cable. To the data, there may be added an identification of the transmitting first station. The drawback of such a method is, firstly, that each first station must be continuously capable of receiving the call signal (selection signal) and of transmitting data. In other words: the transmitter and receiver of the first station should be permanently activated. For battery-powered first stations, however, the problem arises that as a result the battery may be exhausted relatively fast.

A method of the above type secondly has the drawback that, in supplement of the data, there should always be transmitted the identification of the transmitting first station, which requires additional transmission time and therefore additional energy.

In the above American patent specification, a method is proposed in which the first stations wait for a selection message (call message). Immediately after receiving a selection message intended for the station in question, the response time slot commences in which the first station transmits its data. In

anticipation of a next selection time slot, the other first stations should keep their receivers switched on. As a result, the first stations consume a relatively large amount of energy. In addition, for this known method, there is a reservation time slot present in the time window for each first station. In the event of large numbers of first stations, this results in an unacceptably large time window.

The American patent specification US 4 466 001 also describes a system for transmitting data in which selection messages are each time transmitted to the various first stations. By polling the first stations with intervals, here, too, the receivers of the first stations should be switched on for a relatively extensive period of time.

The object of the present invention is to eliminate the above and other drawbacks, and to provide a method of the type referred to in the preamble, which facilitates a very efficient energy consumption of the first stations. Such a method is therefore, in accordance with the invention, characterised by transmitting, in one single selection time slot, the selection messages and the deactivation, by each first station, of its receiver if no respective selection message has been transmitted.

By transmitting the selection messages in one single selection time slot, the time period during which the receivers of the first stations must be activated to collect any further selection messages, is severely restricted. In the single selection time slot, each first station may verify whether there has been transmitted a selection message intended for it. If such is not the case, the first station in question may deactivate its receiver for the remainder of the time window, since there will follow no further selection messages. As a result, there are attained significant savings in energy, which will significantly extend the effective operating time of the first stations, particularly battery-powered first stations.

Deactivating the receivers of the unselected first stations may take place at the end of the selection time slot, e.g., at a predetermined time, or in response to a deactivation message, which may also be transmitted in the selection time slot. The selection messages are advantageously transmitted in a predetermined order, and

deactivating takes place based on the sequence. As a result, it is possible that, prior to the end of the selection time slot, a first station may already determine, based on selection messages located earlier in the sequence, that there will be transmitted no selection message intended for it. This has the advantage that the receiver of the first station may be switched off sooner.

The sequence may be, e.g., a numeric order, a number being allotted to the first station, and the numbers being run through consecutively. There may also be applied a deviating order, stored in both the first and the second stations.

The selection messages are advantageously transmitted in a predetermined order, and deactivation takes place based on the order. By alternately using, e.g., an ascending and descending number sequence, it is prevented that specific first stations must always wait longer than other ones before their respective selection message is transmitted or not. As a result, the energy consumption of the first stations is distributed more evenly.

The selection messages may each contain a time indication of the respective response time slots. In this manner, there may be realised a suitable allocation of the available response time slots for each time window. In addition, it is achieved that for all selected first stations the response time slot in question is known no later than at the end of the selection time slot.

A flexible allocation of the response time slots may also be achieved if the selection messages each contain a time indication of command time slots following the selection time slot for transmitting command messages from the second station to the selected first station.

A command message preferably contains a time indication of a response time slot. By introducing such a form of indirection, command messages may be transmitted to the selected first stations. Since only the selected first stations need an activated receiver during the command time slots, the required amount of additional energy is minimal.

In order to achieve further energy savings, the transmitter of each first station is only activated during the respective response time slot.

Although the time window may have a fixed, predetermined

duration, the duration of the actual time window is advantageously transmitted from the second station in the synchronisation time slot to the first stations. As a result, it is possible to adjust the duration of each time window to the number of first stations to be selected, i.e., the amount of data to be transmitted.

The invention further provides a system for transmitting data, comprising:

- several first stations, each having a first transmitter, a first receiver, a first control unit and a first clock,
 - 10 - a second station having a second transmitter, a second receiver, a second control unit and a second clock,
- the first stations being arranged for synchronising their clocks based on a synchronisation message transmitted by the second station, and transmitting data as a function of selection messages transmitted
-
- 15 by the second station, which system, in accordance with the invention, is characterised in that the second station is arranged for consecutively transmitting the selection messages, and that the first stations are arranged for deactivating their receivers in response to the absence of a corresponding selection message. In
- 20 addition, the invention provides a measuring station (first station) and a collection station (second station) for application in such a system.

The invention will be explained in greater detail hereinbelow by reference to the figures.

25 FIG. 1 schematically shows a system for transmitting data, to which the present invention may be applied.

Figures FIG. 2A and 2B schematically show a first station and the second station of the system of FIG. 1, respectively.

Figures FIG. 3 and 4 schematically show time windows for transmitting data in accordance with several embodiments of the

30 present invention.

The system schematically shown in FIG. 1 and shown only by way of example for transmitting data, comprises first stations 1a, 1b, 1c, 1d and a second station 2. Although in FIG. 1 four first

35 stations are shown, basically any number of first stations may be applied. The first stations 1a-1d which, e.g., occupy fixed positions, may form, e.g., measurement stations for measuring meteorological or geological data. The second station 2 may comprise

a fixed station, but may also be formed by, e.g., a satellite.

In FIG. 2A, a first station 1 is schematically shown in greater detail. The first station 1 comprises a transmitter 11, a receiver 12, a control apparatus 13, an antenna 14, a battery 15, a clock 16 and a measuring apparatus 17, which are mutually coupled. The measuring apparatus 17 may be provided with sensors (not shown) and a data buffer. The clock 16 may be, e.g., a clock for universal time (e.g., GMT [= Greenwich Mean Time]), or a synchronised counter.

The second station 2 schematically shown in FIG. 2B comprises a transmitter 21, a receiver 22, a processing unit 23, an antenna 24, a power supply 25 and a clock 26, which are mutually coupled. The processing unit 23, which may be formed by, e.g., a microprocessor, may serve both for processing data (e.g., measurement data transmitted from the first stations) and for controlling the second station 2.

The transmitters 11 and 21, and the receivers 12 and 22, may be commercially available components which are arranged, e.g., for wireless transmission by way of a suitable radio frequency which may also lie in a frequency band for wireless telephony (e.g., GSM [= Global System for Mobile communications]). Basically, use may be made of one frequency for both the transmitter and the receiver (half duplex), but it is also possible to use different frequencies for the transmitter and the receiver.

In the system of FIG. 1, data is to be transmitted from the first stations 1a-1d to the second station. In accordance with the invention, the second (central) station 2 unequivocally allots time slots to the first stations 1a-1d for this purpose within a time window. This will be explained in greater detail by reference to the figures FIG. 3 and 4.

In accordance with a first embodiment, the time window 4 schematically shown in FIG. 3 comprises four consecutive response time slots 8a, 8b, 8c and 8d, which start at the times T2, T3, T4 and T5, respectively. In the embodiment shown, each of the time slots 8a-8d is allotted to one of the first stations 1a-1d of FIG. 1. Here, the order of allocation is basically random. The allocation itself takes place beforehand, in an initialisation process, the receivers of all first stations being active and the second station transmitting, e.g., an identification to each first station, as well

as the time limits (e.g., T3 and T4) of the allotted time slot in question. The initialisation process is carried out on the basis of the time slots 5 and 6. In the synchronisation time slot 5, which starts at time T0 (= start of the time window 4), the second station
5 2 transmits a synchronisation message SYN to all first stations. In the selection time slot 6, which starts at time T1, the second station transmits a selection message SEL to selected first stations. This will be explained in greater detail later.

In accordance with the invention, the first stations in their
10 allotted time slots sequentially transmit data to the second station. In this connection, the first station 1a transmits, e.g., in the time slot 8a, i.e., between times T2 and T3. Subsequently, the first station 1b transmits in time slot 8b, etc. In this manner, the transmitter (11) of the first station 1a need be active and consume
15 energy only between times T0 and T1, since said transmitter may be switched off at time T1. Possibly, the transmitter may be switched off earlier if the end of the data to be transmitted is reached prior to the end of the time slot. If the first station in question need not transmit any data, it is possible for the transmitter not to be
20 switched on at all. Periodically, however, the transmitter may be activated to report the correct functioning of the first station.

In accordance with the invention, the receivers (12) of the first stations may be switched off during or after the selection time slot 6, i.e., no later than time T2. This will be explained in
25 greater detail later.

Preferably, the time window 4 is cyclically repeated, the time slot 5 of the next time window following the time slot 8d (T6=T0'). As a result, in the exemplary embodiment shown in FIG. 3 each first station permanently has at its disposal one-fourth part of the
30 response time slots 8 of the time window 4 for transmitting data, so that each transmitter is inactive for more than three-quarters of the duration of time window 4. The receivers of the first stations are preferably switched off during the response time slots 8.

At the start of the time window 4, a synchronisation message
35 SYN and a selection message SEL are transmitted. On the basis of the synchronisation message SYN, the first clocks 16 are synchronised with the second clock 26; see figures FIG. 2A and 2B. For this purpose, in each time window the receivers of the first stations are

on during the synchronisation time slot 5. As a rule, it will not be necessary to transmit a synchronisation message SYN in each time window 4. It is therefore possible to carry out the method according to the invention with at least a few time windows in which no synchronisation message SYN is present, and possibly no synchronisation time slot 5.

In selection time slot 6, the second station subsequently transmits selection or request messages SEL. Said selection messages each contain a first identification ("address") ID for indicating a specific first station, and a second identification ("time") TR for indicating an allotted response time slot. The first identification ("address") may be a number which is permanently allotted to a first station. The second identification preferably is a start time (e.g., T4) of a response time slot 8. The start time is advantageously expressed as a time difference with respect to start time T0 of the time window. Possibly, the second identification may also contain an end time (e.g., T5) of the time slot in question, or the number of bytes to be transmitted. The amount of selection information to be transmitted may be restricted, however, by laying down the duration of the response time slots in advance, so that there need not be transmitted any end time or number of data units.

The selection messages are consecutively transmitted in the single selection time slot 6. In this time slot 6, therefore, there on the receivers of all first stations having data to be transmitted are on. As soon as an identification of a time slot is received by the station in question, it may switch off its receiver. If the identifications are transmitted in numerical order, the first station having, e.g., the highest number, will have to keep its receiver activated the longest. In order to be able to distribute the energy consumption of the receivers proportionally among the first stations, the table (or identifications of first stations having allotted time slots, respectively) is run through and transmitted alternately in ascending and descending order. It is also possible each time to run through said identifications in another, preferably randomly determined, order.

In response to the selection or request message (SEL), the first station in question transmits data to the second station in the response time slot allotted to it.

In this embodiment, therefore, the receiver of a first station need only be activated during selection time slot 6. The receivers of the first stations are preferably activated during each synchronisation time slot 5 as well. Such is not necessary, however, if the duration of the time window 4 does not change and the first clocks are sufficiently accurate.

A first station may optionally transmit an overflow message M, indicating that more data is present than is capable of being transmitted in one response time slot. In such case, said overflow message M is included in the data field of the time slot 8 in question. If there is an overflow message M present in a response time slot, the first station in question will have the opportunity, if possible, to transmit supplementary data. Such may be realised in several ways.

The second station will preferably prepare a table having first stations which did transmit an overflow message M, a selection message SEL being transmitted in a subsequent time window (4') only to those first stations which did transmit an overflow message M in the preceding time window. In this connection, other and/or supplementary time slots may possibly be allotted to said first stations.

In the embodiment of FIG. 4, there are added command time slots 7 to the time window 4, namely, between the selection time slot 6 and the first response time slot 8a. In the command time slots 7 - the four command time slots 7a-7d in the embodiment shown - the second station transmits commands COM to the selected first stations.

In this embodiment, the second identifications ("times") TR of the selection messages do not indicate the response time slots 8, but rather the command time slots 7. In other words, based on the selection messages SEL each first station may determine whether, and if so when, it will receive a command message COM. First stations which are not selected may switch off their receiver for the remainder of the time window in question.

The command messages COM preferably contain a first identification ("address") ID indicating a first respective station and a second identification ("time") TR indicating a response time slot 8. In this respect, the command messages COM correspond to the selection messages SEL of the first embodiment. The command messages

COM, however, may also contain a command (instruction) for the first station in question. Such a command, e.g., instructs a measuring apparatus connected to the first station to carry out an operation, or changes the settings of the first station itself.

5 The first identification ("address") ID containing a command message COM may include a subaddress indicating a part (e.g., a connected measuring apparatus) of the first station, and/or a superaddress indicating several first stations. In the latter case, a supplementary address may be transmitted to a first station,
10 enabling a separate identification within the group indicated by the superaddress.

By way of the command time slots and the indirection offered thereby, a very flexible transmission of commands and allocation of response time slots are possible. Still, the additional energy
15 consumption of the first stations is minimal, since they need to activate their receivers only during the command time slot allocated to them.

It will be understood that in this embodiment, too, energy is saved in the first stations, since the transmitters and/or receivers
20 of the first stations may be inactive most of the time.

An even more flexible method is provided if the length of the time window 4 is variable. For this purpose, the synchronisation message SYN, which is transmitted in the synchronisation time slot 5, may also contain an indication of the end (T10 in FIG. 4) of the time
25 window. Said indication preferably has the form of a time difference with respect to start time T0.

Although in the above embodiments it was assumed that in each time window 4 a response time slot 8 is allotted to all first stations, such need not be the case at all and the second station (in
30 a specific time window) may allot a response time slot only to one or a few first stations. Possibly, the first stations, which are not selected in a specific time window, may have their turn in a subsequent time window.

A major advantage of the present invention is the fact that the
35 number of first stations is substantially unlimited. By adaptively allotting, in each time window, time slots to first stations, it is possible, with a single second station, to transmit data from a substantially arbitrary number of first stations.

In the method according to the invention, the second station therefore first broadcasts a synchronisation message intended for all first stations, subsequently selection messages intended for selected first stations, possibly also command messages intended only for
5 selected first stations, to eventually receive data from the selected first stations in the time slots allotted to them. On the basis of the selection messages, the first stations switch off their receiver or not. They are preponderantly passive, but may pass along an overflow message along with their data, indicating that they have
10 more data to transmit. Also, the transmission of data by a first station in the time slot allotted thereto serves as a confirmation of receipt of the selection and/or command message in question. The first stations, therefore, need not transmit any confirmation or reservation message.

15 It will be understood by those skilled in the art that the invention is not limited to the embodiments shown, and that many modifications and amendments are possible without departing from the scope of the invention.

CLAIMS

1. Method for transmitting data from several first stations (1a-1n) to a second station (2), the first stations each comprising at least a first transmitter (11), a first receiver (12) and a first clock (16), and the second station (2) comprising at least a second transmitter (21), a second receiver (22) and a second clock (26), the method comprising:
- transmitting, in a synchronisation time slot (5) of a time window (4), a synchronisation message (SYN) from the second station (2) to the first stations (1),
 - transmitting, in a selection time slot (6) of the time window (4), selection messages (SEL) from the second station (2) to selected first stations (1),
 - transmitting, in response time slots (8) of the time window (4), data from selected first stations (1) to the second station (2),
- characterised by transmitting, in a single selection time slot (6), the selection messages (SEL) and by deactivating, by each first station (1), its receiver (12) if no respective selection message (SEL) has been transmitted.
2. Method according to claim 1, wherein the deactivation takes place at the end of the selection time slot (6).
3. Method according to claim 1, wherein the selection messages (SEL) are transmitted in a predetermined sequence and the deactivation takes place based on the sequence.
4. Method according to claim 3, wherein several sequences are applied and a sequence indication of the sequence to be applied in a specific time window (4) is transmitted by the second station (2) in the synchronisation time slot (5).
5. Method according to any of the preceding claims, wherein the selection messages (SEL) each contain a time indication (TR) of the response time slots (8).

6. Method according to any of the claims 1-5, wherein the selection messages (SEL) each contain a time indication (TC) of command time slots (7) following the selection time slot (6) for transmitting command messages (COM) from the second station (2) to the selected first station (1).

7. Method according to claim 6, wherein a command message (COM) contains a time indication (TR) of a response time slot (8).

8. Method according to any of the preceding claims, wherein the transmitter (11) of each first station (1) is activated only during the respective response time slot (8).

9. Method according to any of the preceding claims, wherein the duration of the current time window (4) is transmitted to the first stations (1) by the second station (2) in the synchronisation time slot (5).

10. System for transmitting data, comprising:
- several first stations (1), each having a first transmitter (11), a first receiver (12), a first control unit (13) and a first clock (16),
- a second station (2) having a second transmitter (21), a second receiver (22), a second control unit (23) and a second clock (26),

the first stations (1) being arranged for synchronising their clocks (16) based on a synchronisation message (SYN) transmitted by the second station (2), and transmitting data as a function of selection messages (SEL) transmitted by the second station (2),

characterised in that

the second station (2) is arranged for consecutively transmitting the selection messages (SEL), and that the first stations (1) are arranged for deactivating their receivers (12) in response to the absence of a corresponding selection message (SEL).

1/2

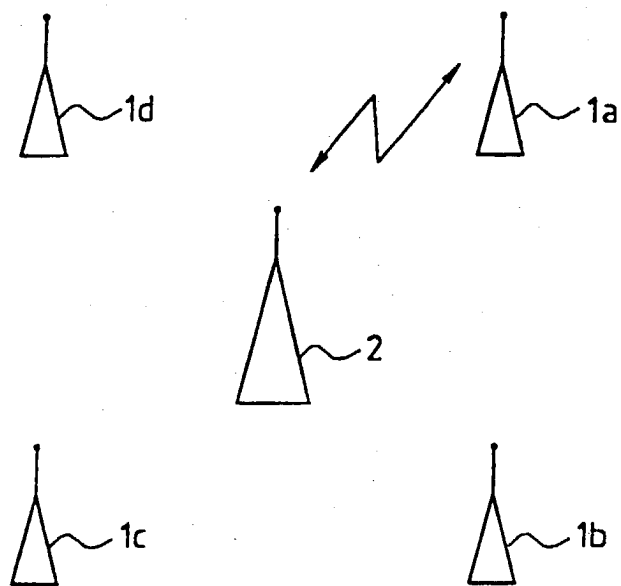


FIG. 1.

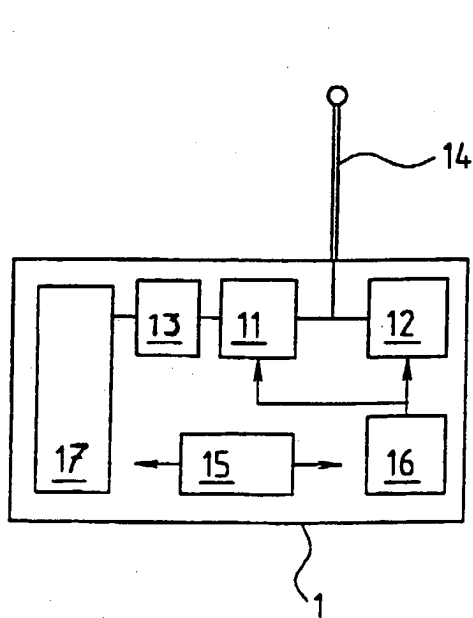


FIG. 2A.

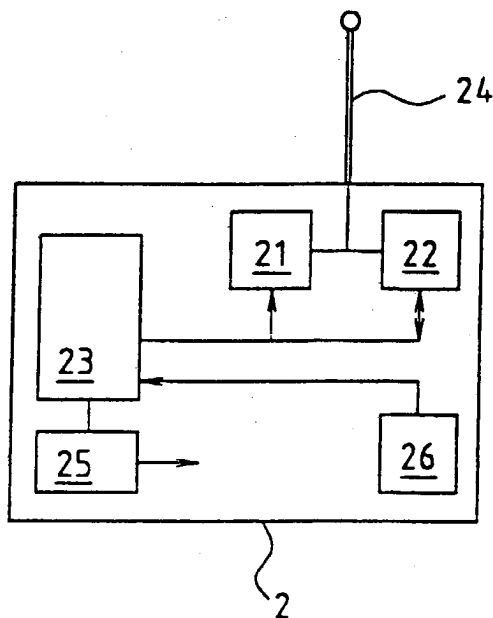


FIG. 2B.

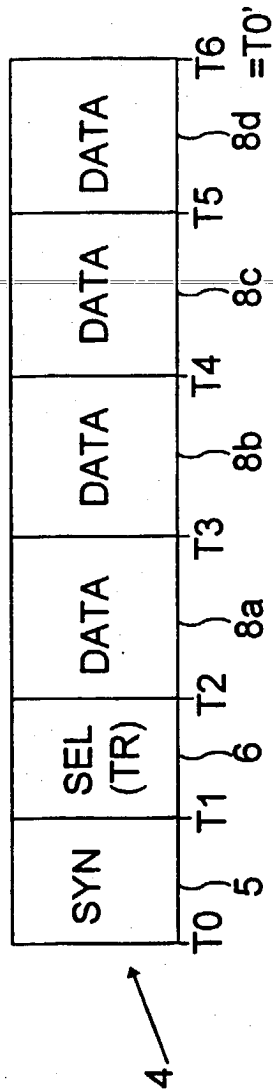


FIG. 3

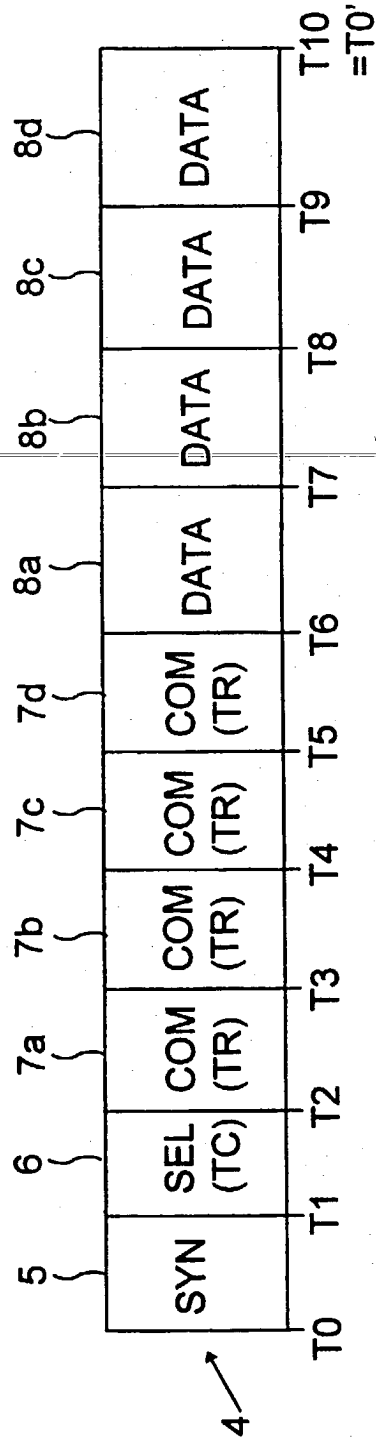



FIG. 4



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 9/04, H04L 12/403		A3	(11) International Publication Number: WO 99/46745
			(43) International Publication Date: 16 September 1999 (16.09.99)
(21) International Application Number: PCT/IB99/00702 (22) International Filing Date: 10 March 1999 (10.03.99) (30) Priority Data: 1008548 10 March 1998 (10.03.98) NL (71) Applicant (for all designated States except US): KONINKLIJKE KPN N.V. [NL/NL]; Stationsplein 7, NL-9726 AE Groningen (NL). (72) Inventors; and (75) Inventors/Applicants (for US only): PIETERSE, Rob [NL/NL]; Verbenalaan 1, NL-2111 ZL Aerdenhout (NL). DE LEEUW, Edo, Mark, Alexander [NL/NL]; Asterstraat 31, NL-3551 SW Utrecht (NL). VAN DER PUT, Ronald, Robertus, Gerardus, Laurentius [NL/NL]; Hoekmanstraat 26, NL-1315 JN Almere (NL). (74) Agent: KLEIN, Bart; Koninklijke KPN N.V., P.O. Box 95321, NL-2509 CH The Hague (NL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Dutch).</i>	
		(88) Date of publication of the international search report: 21 October 1999 (21.10.99)	

(54) Title: METHOD AND SYSTEM FOR TRANSMITTING DATA

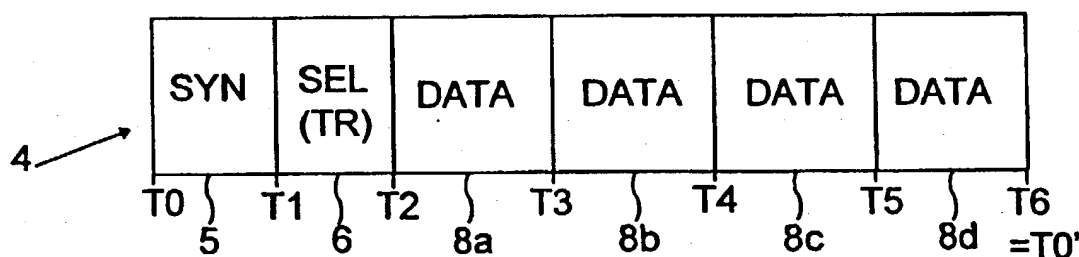

(57) Abstract

A method for transmitting data from several first stations (1a-1n), such as measuring stations, to a second station (2), such as a data-collection station, comprises: transmitting, in a synchronisation time slot (5) of a time window (4), a synchronisation message (SYN) from the second station (2) to the first stations (1), transmitting, in a selection time slot (6) of the time window (4), selection messages (SEL) from the second station (2) to selected first stations (1), transmitting, in response time slots (8) of the time window (4), data from selected first stations (1) to the second station (2). In order to save energy in the first stations, the selection messages (SEL) are transmitted in one single selection time slot (6) and its receiver (12) is switched off by each first station (1) if no respective selection message (SEL) has been transmitted.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 99/00702

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 H04Q9/04 H04L12/403

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 529 269 A (IBM) 3 March 1993 (1993-03-03) column 5, line 28 - column 12, line 42 ---	1,10
A	US 5 297 144 A (GILBERT SHELDON L ET AL) 22 March 1994 (1994-03-22) cited in the application column 10, line 61 - column 13, line 27 ---	1,10
A	US 4 466 001 A (MOORE MORRIS A ET AL) 14 August 1984 (1984-08-14) cited in the application -----	1,10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 August 1999

Date of mailing of the international search report

01/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Janysek, J-M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 99/00702

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0529269 A	03-03-1993	US 5241542 A	31-08-1993
		DE 69228156 D	25-02-1999
		DE 69228156 T	05-08-1999
		JP 2047961 C	25-04-1996
		JP 5207020 A	13-08-1993
		JP 7083362 B	06-09-1995
<hr/>			
US 5297144 A	22-03-1994	NONE	
<hr/>			
US 4466001 A	14-08-1984	NONE	
<hr/>			